


ASSEMBLY INSTRUCTIONS

Helinox Chair Two



Assembly instructions are printed on the reverse side of the seat – so you'll never lose them!

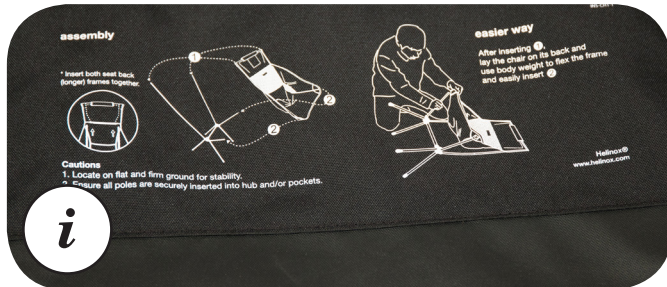

The easiest way to fit the lower part of the seat is to lay the chair on its back. Then use your body weight to help insert the poles into the lower seat pockets.



Place the legs and seat poles fully into the sockets and assemble the rear seat poles together.



To use the carry bag as a neck pillow, fill it with padding of your choice. Open the 'Pillow Attachment' flap and attach the bag to the seat back using the velcro.

Slide the rear poles into the pockets on the seat top. The pockets are long, so do this a little at a time on each side.

Make sure the poles slide all the way in and don't get stuck on the line of stitching across the pocket (circled).



Use the supplied velcro 'hook' adapter to attach the flap to the rear of the seat. This enables the neck pillow to be mounted higher if needed.



The optional rocking feet should be fitted to the front legs first, then fit the rear leg into the socket. Remove in reverse order (rear first).



Warning: This is a light chair. When empty it can easily blow away. When getting up, place something heavy on the seat for ballast.



Use caution when placing chair near a campfire. Sparks may damage the seat fabric and in windy conditions the chair may blow into the fire.